




Justrite Safety Group

Wet/Dry and Oily Areas - Medium duty

# 566 Superflow<sup>®</sup> XT

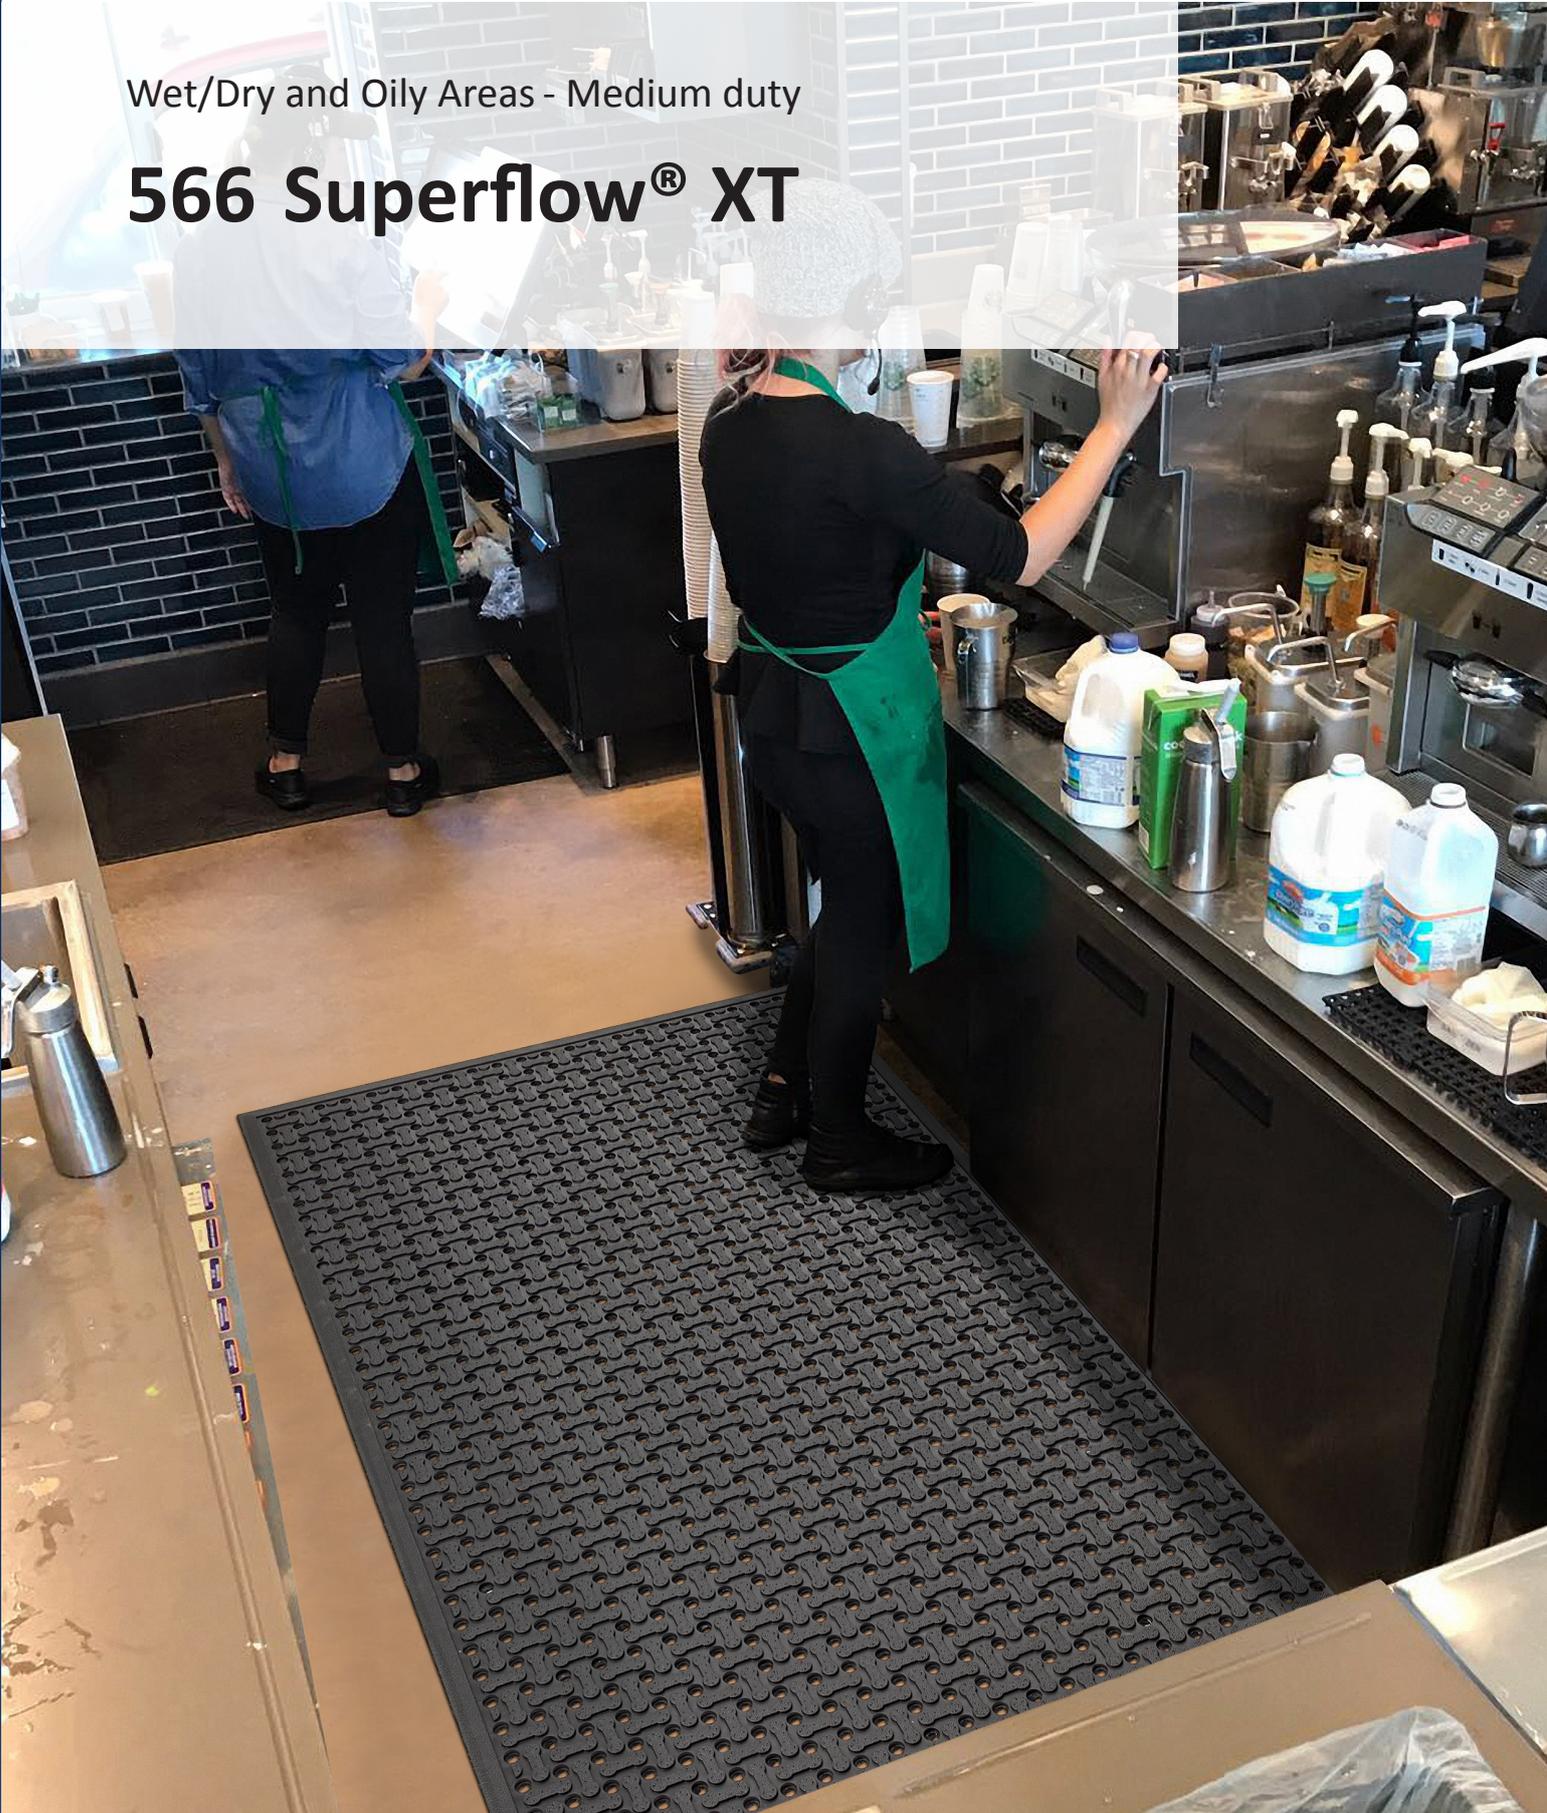

Wet/Dry and Oily Areas - Medium duty

# 566 Superflow<sup>®</sup> XT

Reversible anti-slip mat is remarkably comfortable and usable on both sides for extended life. Its perforated woven surface is slip resistant surfaces while allowing instant evacuation of liquids in wet areas. Low profile for easy cart access and lightweight to facilitate lifting and cleaning.

Rubber duckboards provide a comfortable and safe working platform in wet areas with its aggressive slip-resistant surface. Large holes and raised studs allow fluids in wet areas or debris in dry areas to fall through leaving the surface clear.

Cleaning with detergent and water-jet is recommended for extended service life.

**Recommended use:**

- Medium duty

**Specifications:**

- Natural rubber
- Moulded bevelled edges on all sides
- Overall thickness: 8,5 mm
- Weight: 8,8 kg/m<sup>2</sup>
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

**Standard sizes:**

- 60 cm x 90 cm
- 91 cm x 152 cm
- 122 cm x 183 cm

**Colours:**

- Black

**Cleaning instructions:**

- Hose off with water




**PRODUCT TESTING**



## 566 Superflow® XT (black)

Art. nr.	Dimensions	Weight kg
566S0023BL	60 cm x 90 cm	4,05
566S0035BL	91 cm x 152 cm	15,6
566S0046BL	122 cm x 183 cm	23,95

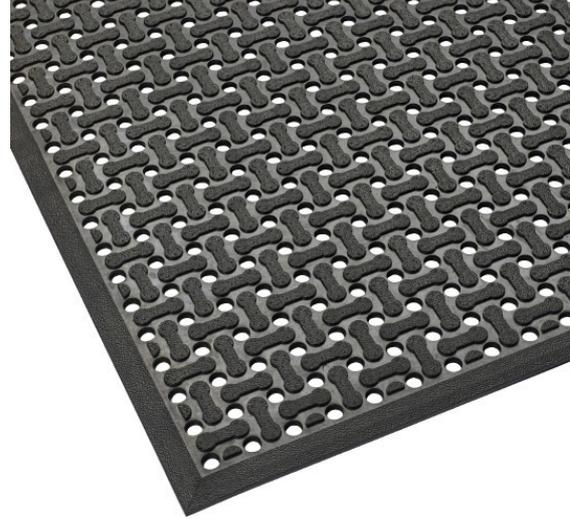

# 566 Superflow® XT

## GENERAL DESCRIPTION

Type	Wet/Dry or Oily Areas - Anti Slip Mats
Description	Reversible anti-slip mat is remarkably comfortable and usable on both sides for extended life.
Recommended use	Wet/Dry and Oily Areas
Surface	Perforated drainage pattern
Category	Ergonomic, Anti-fatigue Safety Matting Medium duty
Colours	Black
Edges	Moulded bevelled edges on all sides

## TECHNICAL SPECIFICATIONS

Material	Natural rubber
Process	Compression Moulding
Total weight	8,8 kg/m <sup>2</sup>
Overall thickness	8,5 mm

## TESTS

Sustainability	Recyclable material	
Elongation	ASTM D412	400%
Tear Strength	ASTM D1004	40 PSI

## DIMENSIONS

Standard sizes	Full rolls	Custom lengths
60 cm x 90 cm		
91 cm x 152 cm		
122 cm x 183 cm		